




Installation Guide


VS 2 (PN 16)- external thread




AMV(E) 10 +
VS 2 DN 15-25





AMV(E) 13 +
VS 2 DN 15-25




AMV(E) 20/30, 23/33 +
VS 2 DN 15-25







AMV 150 +
VS 2 DN 15





DN	L ₁	L ₂	L ₃	H	a	SW	Weight
	mm				ISO 228/1	mm	kg
15	139	131	65	54	G ¾A	32	0.25
20	154	142	70	58	G 1A	41	0.35
25	159	159	75	58	G 1¼A	46	0.57

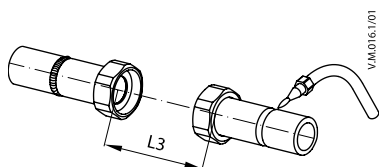

DN	L ₁
	mm
15	69
20	74
25	79

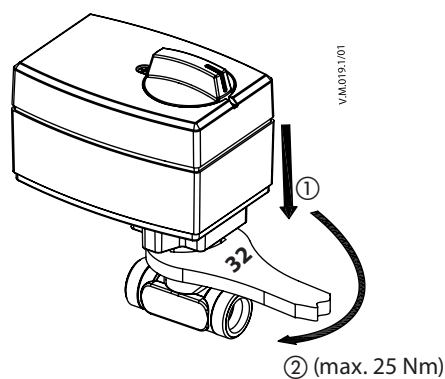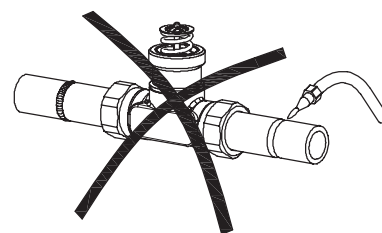


Installation Guide VS 2 (PN 16), external thread

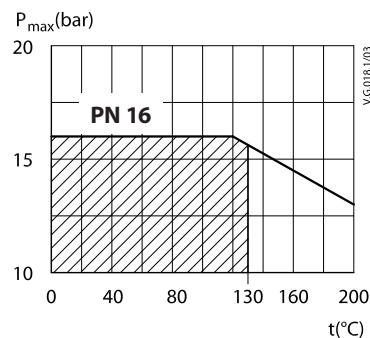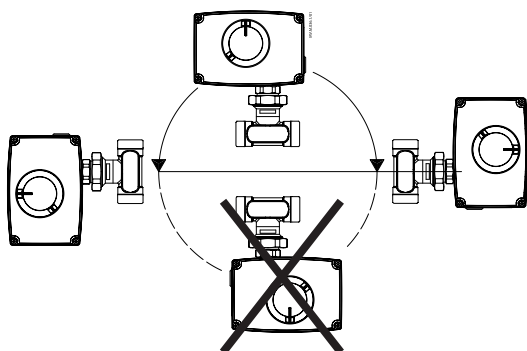

V-092.1/01
SIBC





T_{max}
130° C




p_{max}
PN 16




Δp_{max}
 $10 \times 10^5 \text{ Pa (10 bar)}$




AMV(E) 10 +
VS 2 DN 15-25



AMV(E) 13 +
VS 2 DN 15-25



AMV(E) 20/30, 23/33 +
VS 2 DN 15-25



AMV 150 +
VS 2 DN 15

DN	L ₁	L ₂	L ₃	H	H ₁	H ₂	H ₃	H ₄	a	SW	Weight
	mm								ISO 228/1	mm	kg
15	139	131	65	54	142	145	155	140	G 3/4A	32	0.25
20	154	142	70	58	149	152	162	-	G 1A	41	0.35
25	159	159	75	58	155	158	168	-	G 1 1/4A	46	0.57

Type	AMV 150	AMV 10/13	AME 10/13	AMV(E) 20/23	AMV(E) 30/33
VS 2 DN 15	•	•	-	-	-
VS 2 DN 20	-	-	•	•	•
VS 2 DN 25	-	-	•	•	•