

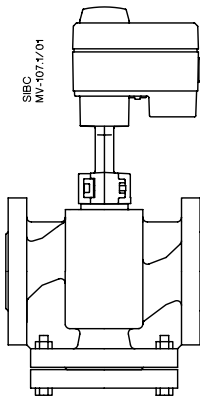


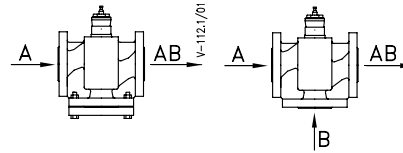
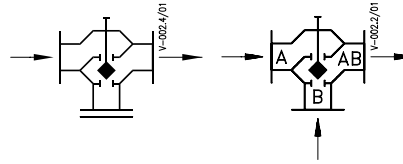


065R9080


065R9080

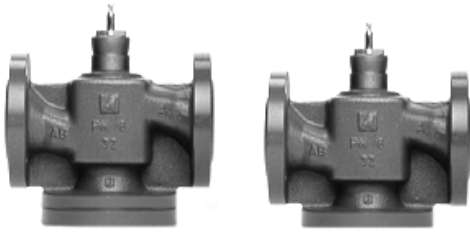


AMV(E) 15
VL2/VL3 DN 15 - 50 mm

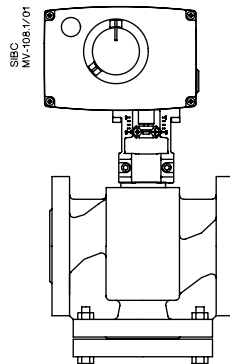


AMV(E) 25, 35
VL2/VL3 DN 15 - 65 mm

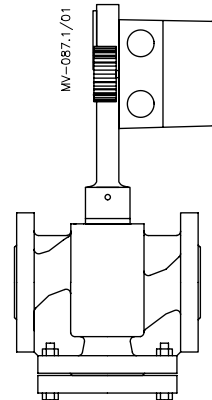


AMV 323, AMV 423, AMV 523
VL2/VL3 DN 15 - 100 mm

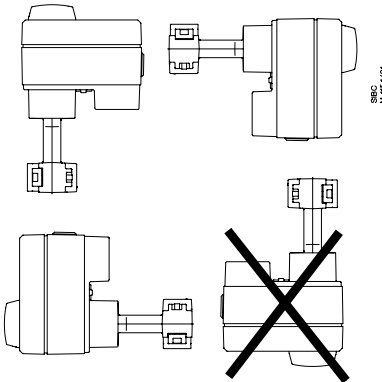

AMV/AME 15

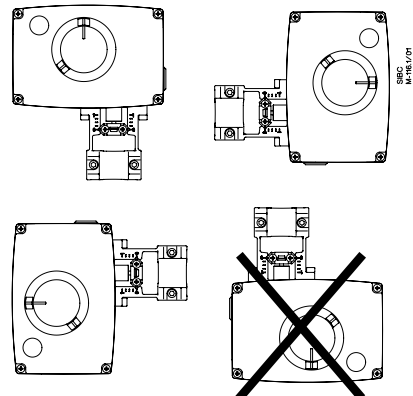

AMV/AME 25, 35

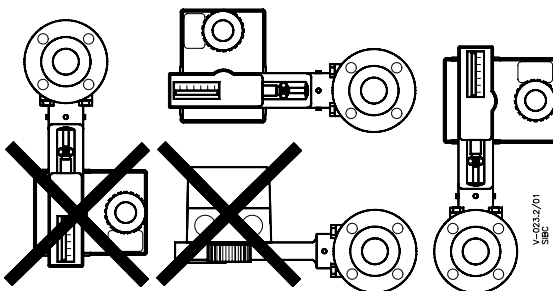

AMV 323, AMV 423, AMV 523

max. t: 130°C
min. t: 0°C

max. P: 6bar

max. P: 10bar

6 bar = 6 kp/cm³ = 85 lbf/in²
10 bar = 10 kp/cm³ = 142 lbf/in²
VL2 / VL3

