
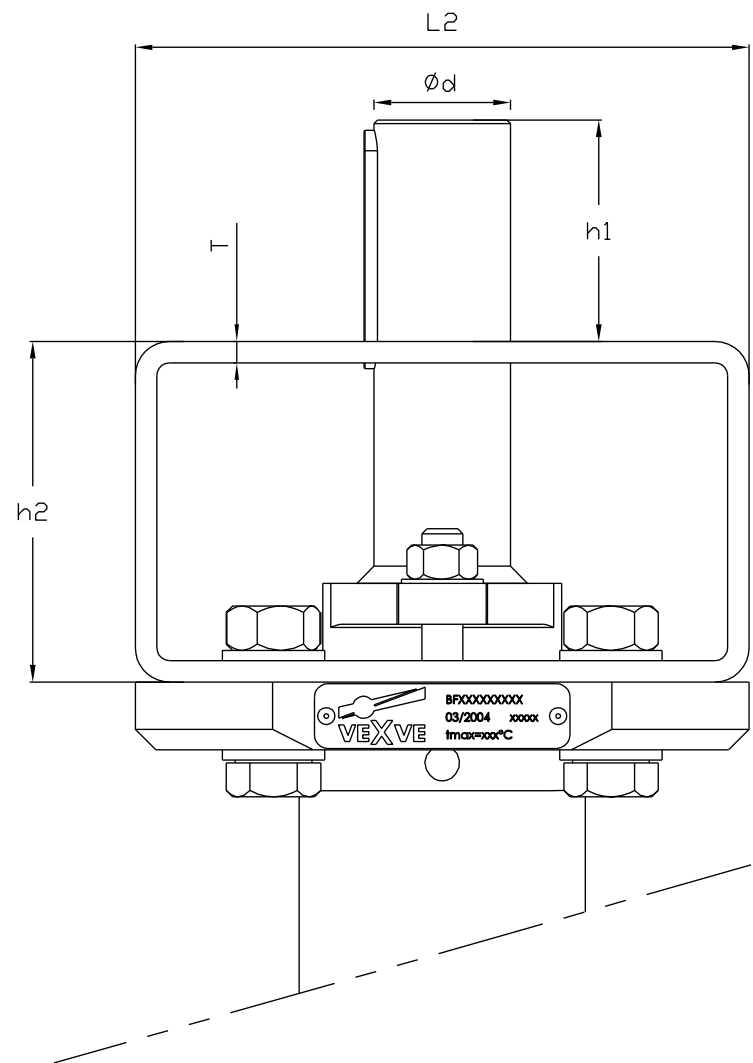


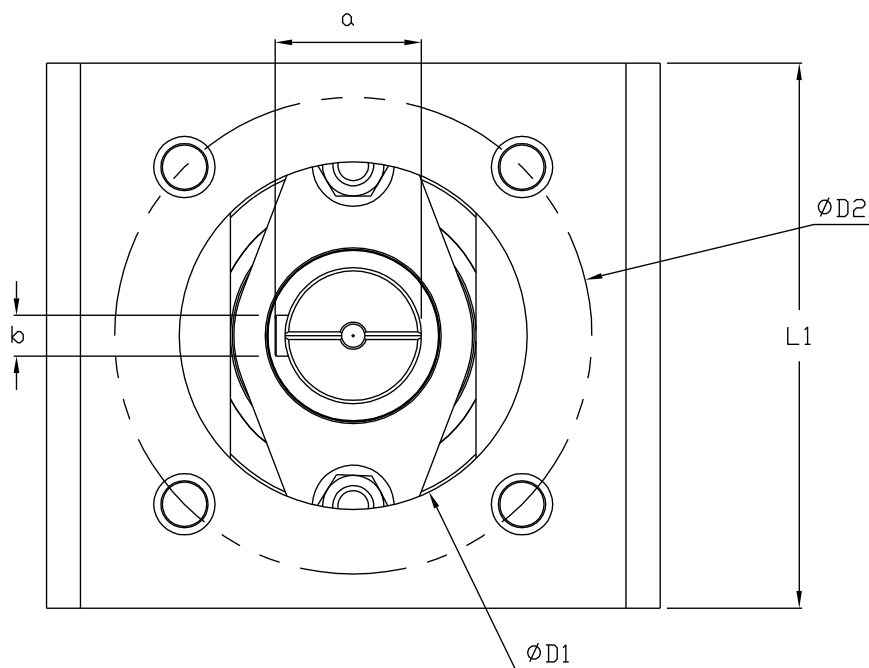

DN	d (mm)	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	h1 (mm)	h2 (mm)	a (mm)	b (mm)	bolts	Flange type	T (mm)
350	35	100	140	160	180	65	100	38	10	4×M16	F14	6,3
400	40	100	140	160	180	65	100	43	12	4×M16	F14	6,3
500	50	130	165	180	200	80	100	53,5	14	4×M20	F16	8
600	60	200	254	270	300	110	100	64	18	8×M16	F25	8
700	70	200	254	270	300	110	100	74,5	20	8×M16	F25	8
800	90	230	298	350	400	130	120	95	25	8×M20	F30	10
900	100	260	356	400	450	180	150	106	28	8×M20	F35	12,5
1000	120	260	356	400	450	180	150	127	32	8×M30	F35	12,5
1200	120	260	356	400	450	180	150	127	32	8×M30	F35	12,5

5	T dimension added	09.11.2010
4	DN1200 added	05.11.2010
3	Stem diameter had been changed from 30mm to 35mm..	02.10.2006
2	DN900 top flange is changed from F30 to F35.	05.09.2005
1	Keys have been changed according to standard.	16.06.2004
Item	Change	

Tolerances		Scale	Product				
			Butterfly valves				
Drawn by	13.05.2004 JV		VEXVE Pajakatu 11 38200 Sastamala Puh. 010-7340800		File		
Desd by	13.05.2004 JV						
Chkd by					Mass kg	BFC/BRC Top flanges	
Appd by							